

Addendum No. 3 February 6, 2024 Page 1 of 2

TOWN OF SEABROOK, NEW HAMPSHIRE

WWTF UPGRADES (SEABROOK BID NO. B2024-SWR-14; CWSRF NO. CS-334178-04)

ADDENDUM NO. 3

.....


To be considered as part of the contract drawings and specifications for the WWTF Upgrades (Seabrook Bid no. B2024-SWR-14; CWSRF no. CS-334178-04), dated 01/04/2024:

REVISIONS TO SPECIFICATIONS

- 1. Section A (time of completion extended 30 days)
 - a. Page A-1 Paragraph 1
 - i. Replace 486 days with 516 days for substantial completion
 - ii. Replace 516 days with 546 days for final completion
 - b. Page A-9 Bid Form
 - i. Replace 486 days with 516 days for substantial completion
 - ii. Replace 516 days with 546 days for final completion
- 2. Section B (time of completion extended 30 days)
 - a. Page B-3 Paragraph 3
 - i. Replace 486 days with 516 days for substantial completion
 - ii. Replace 516 days with 546 days for final completion

REVISIONS TO DRAWINGS

- 1. Drawing S301
 - **a.** Clarification that the structural steel angles at the top of the existing CMU wall along the ceiling, as shown in Elevation no. 2 and Detail no. 7, shall be installed along the entire length of that wall, approximately 30 feet. Refer to the yellow highlighted area in the image below.

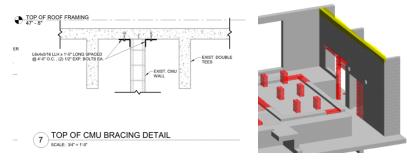

- 2. Drawing A801
 - a. The louver for the store front system should be 6 inches deep, which would include the dampers, too.
- 3. Drawings E202 and E204 (*Revised and Re-issued*).
 - a. Refer to attached re-issued drawings for disconnect and wiring information. Disconnects shall be fused type.


Addendum No. 3 February 6, 2024 Page 2 of 2


ATTACHMENTS


1. Drawings E202 and E204

END OF ADDENDUM NO. 3


P:\NH\Seabrook\ENG22-0322 WWTF Upgrades\150 - Bidding\Addenda\Addendum no. 3\WWTF Upgrades-AD03.docx

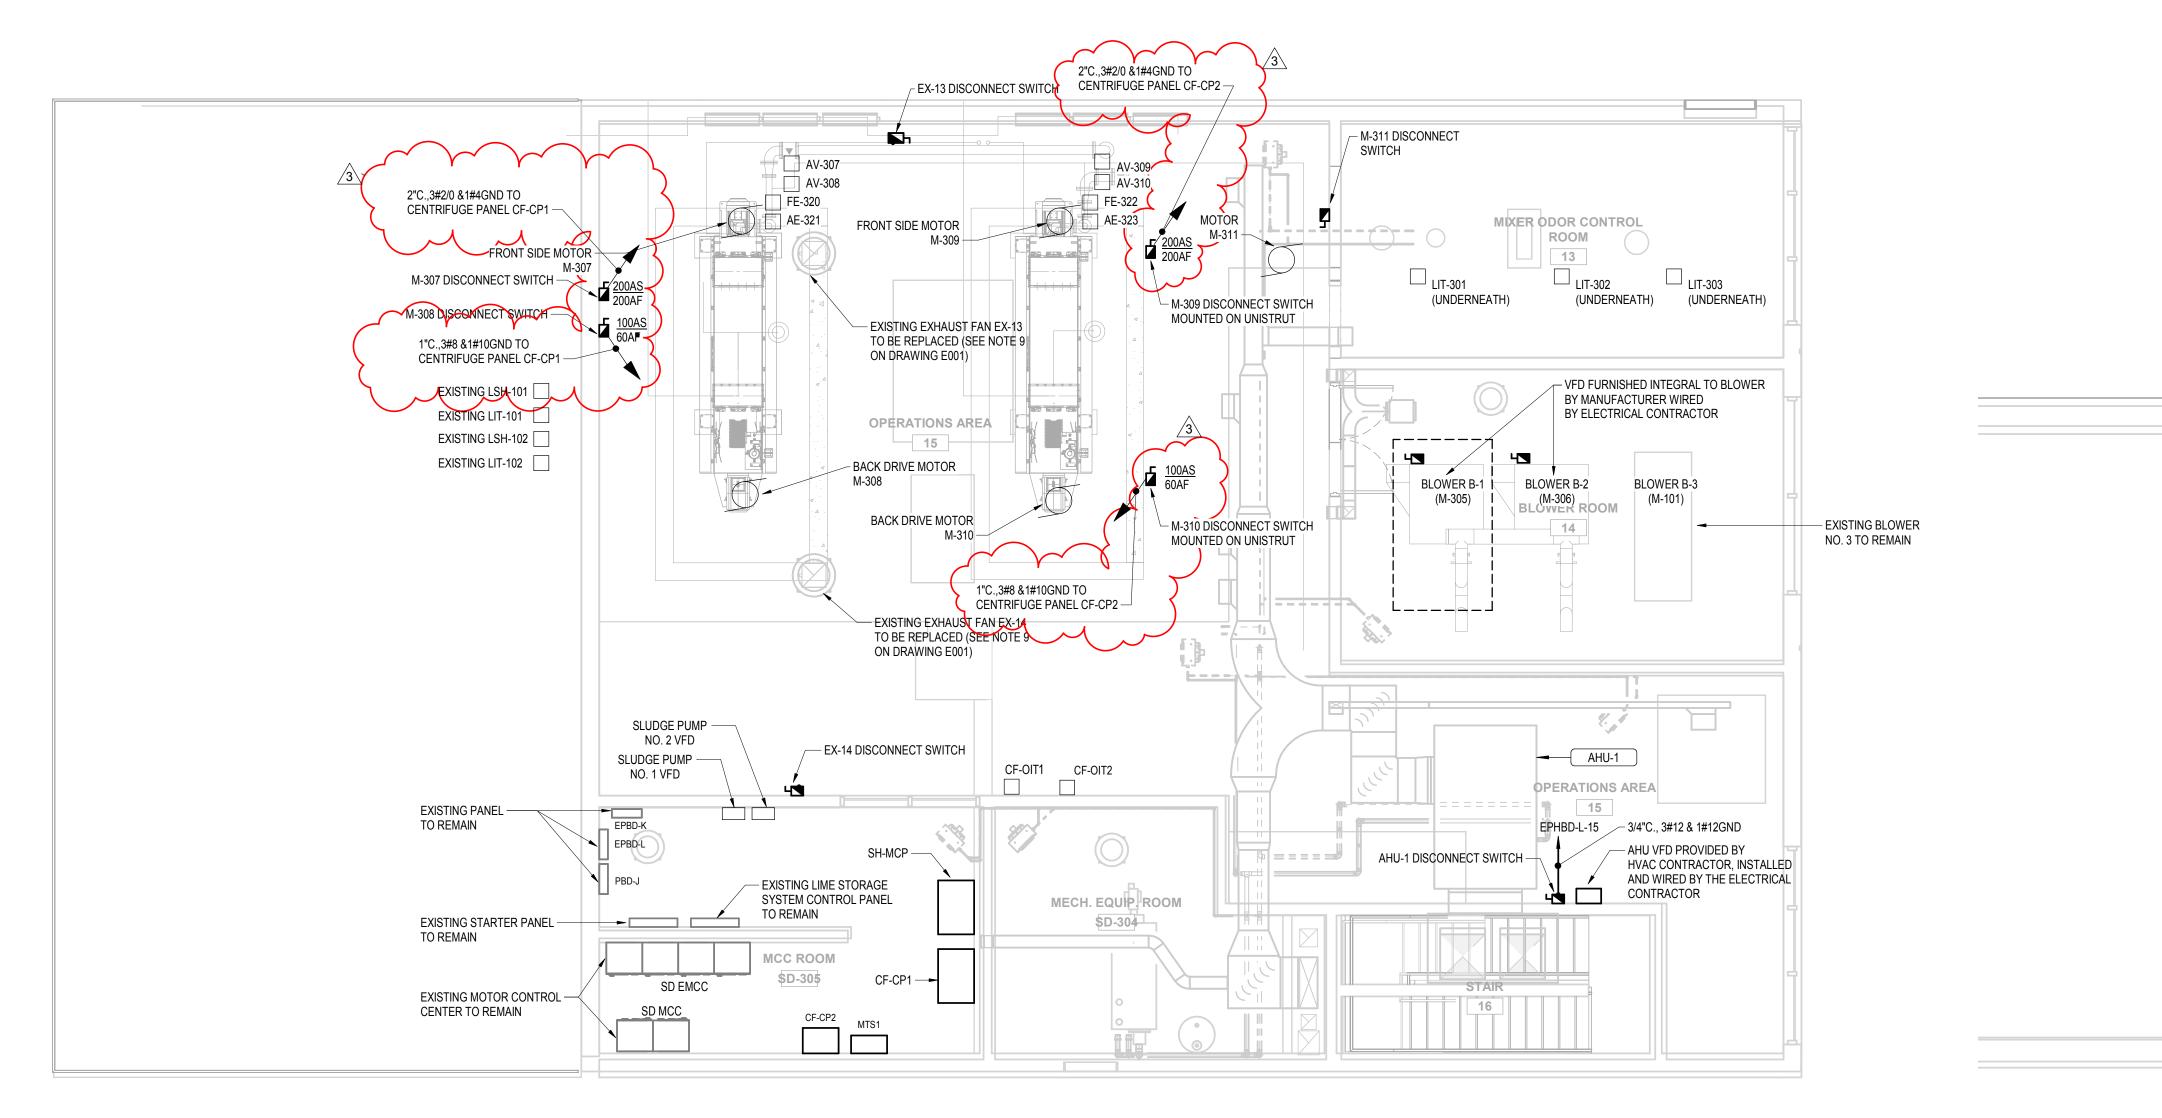





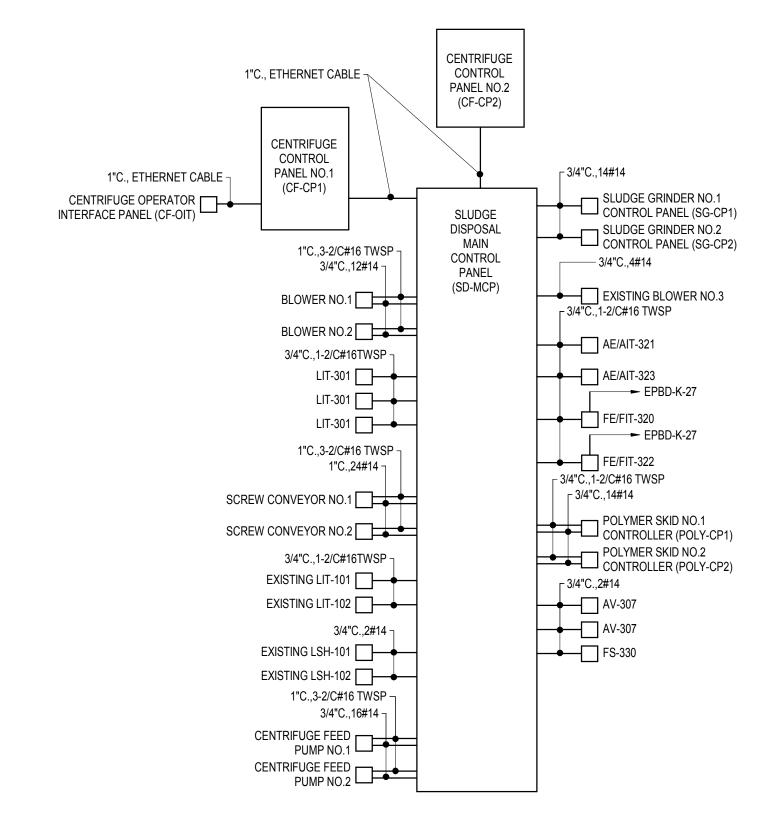


INSTRUMENTATION CONTROL PANEL WIRING DIAGRAM NOT TO SCALE

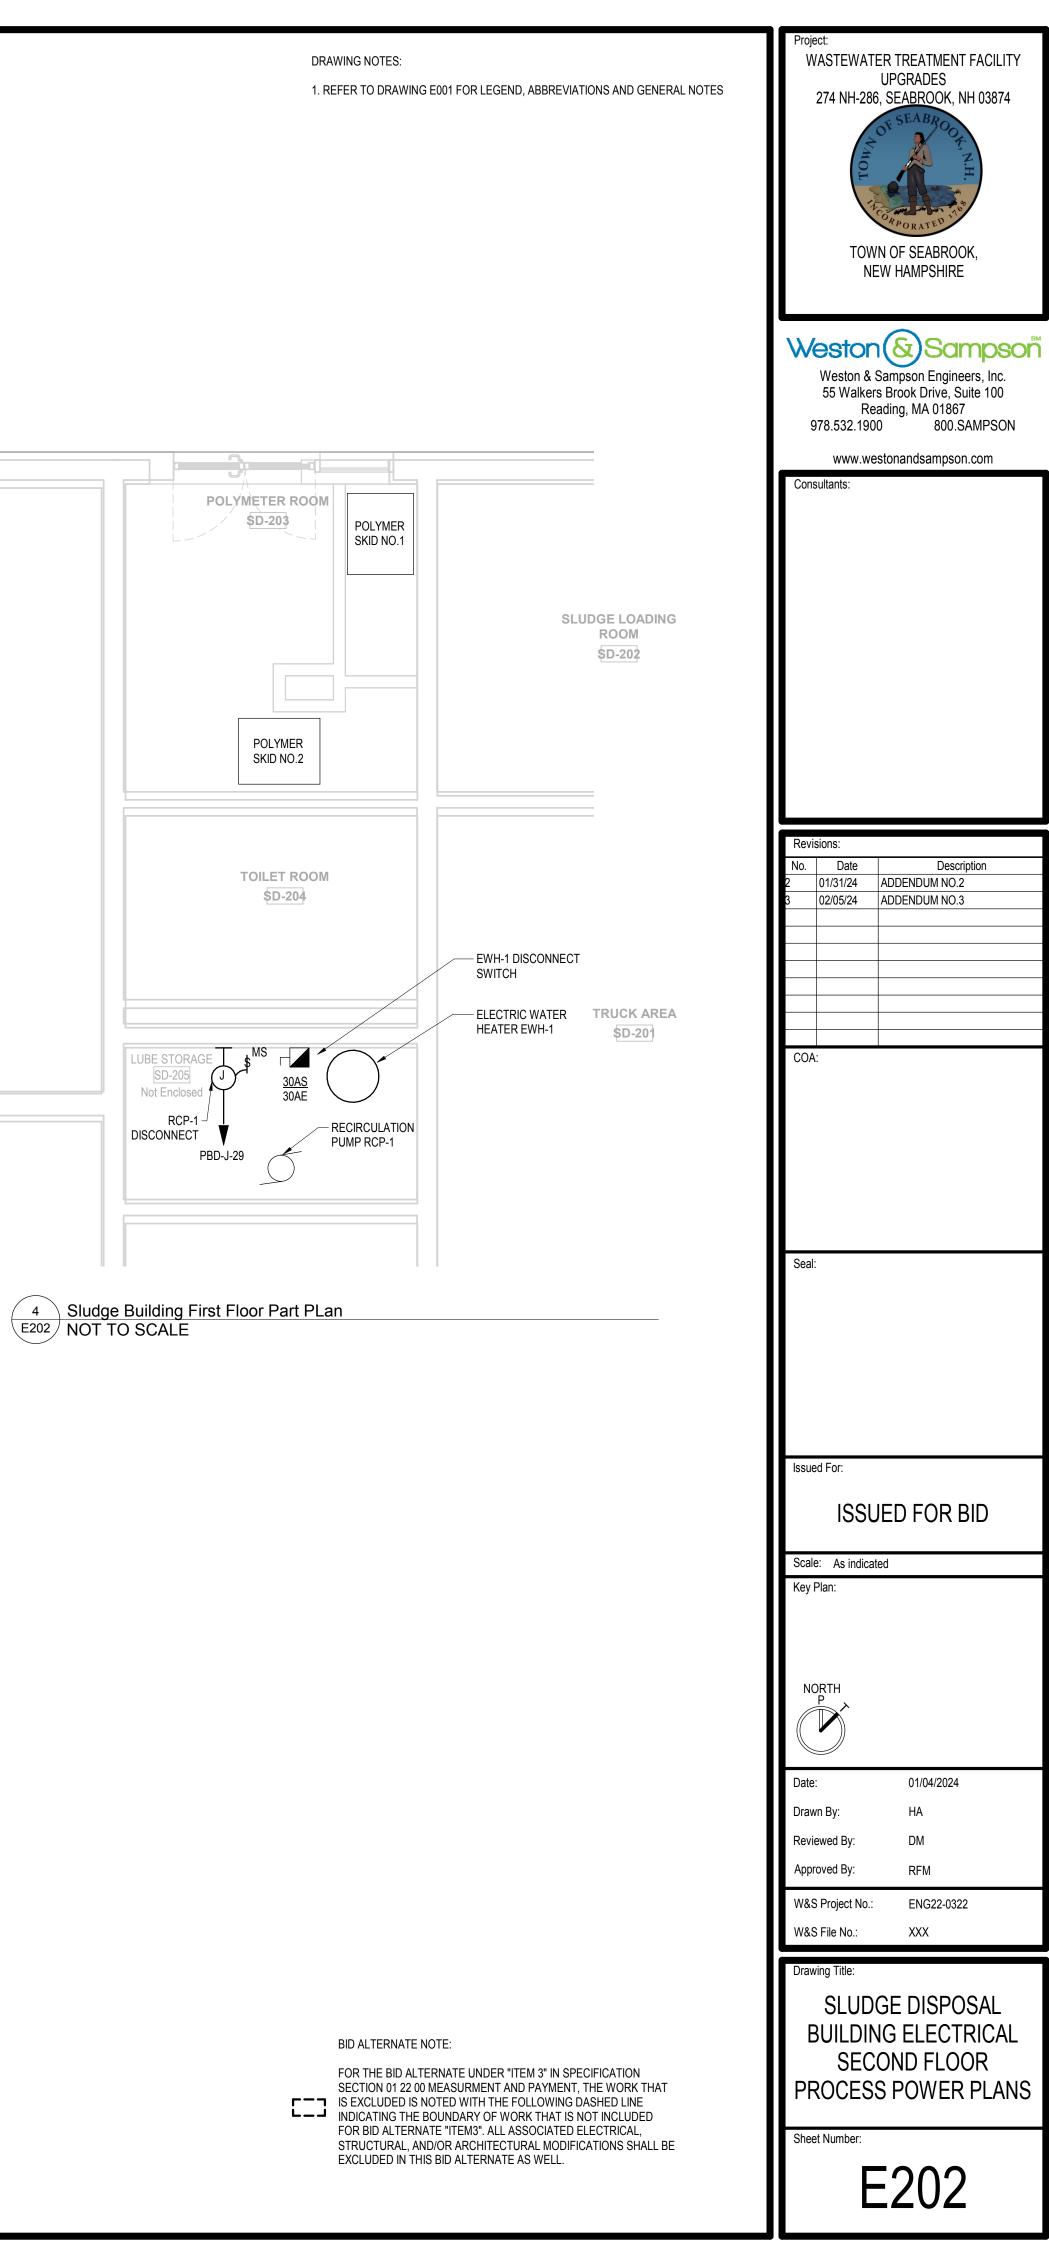


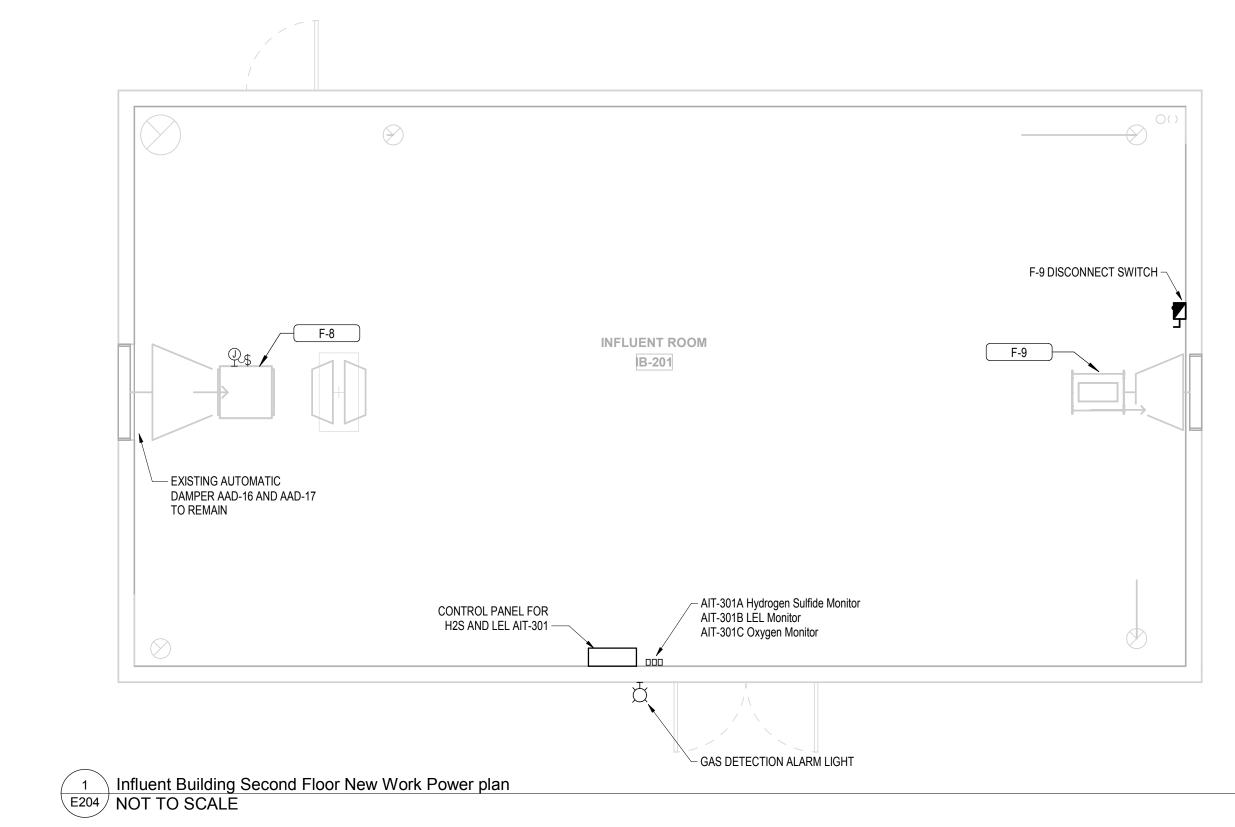


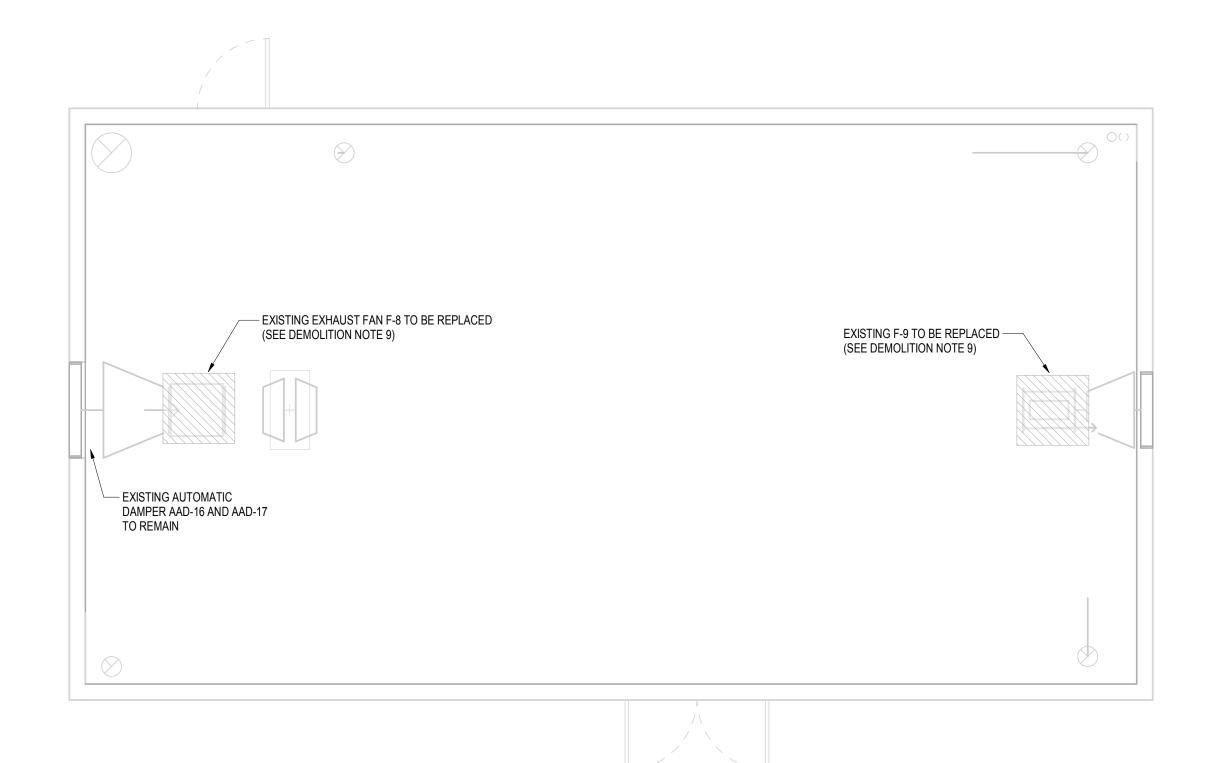

2 Influent Building Second Floor Demolition Power plan E204 NOT TO SCALE

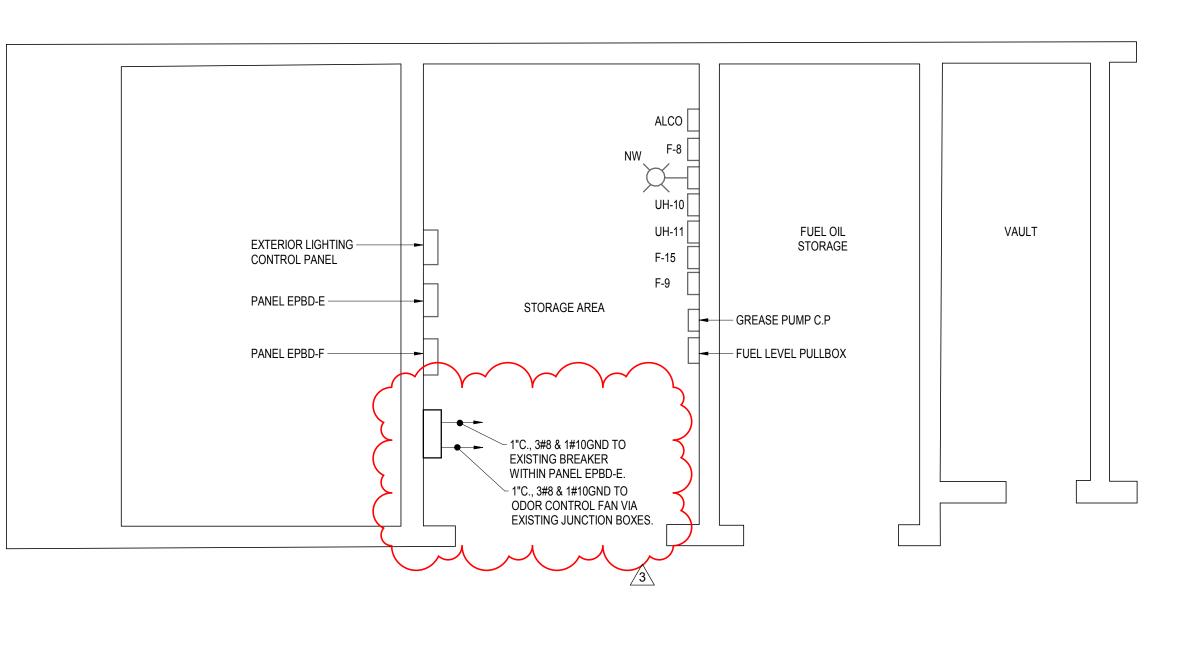



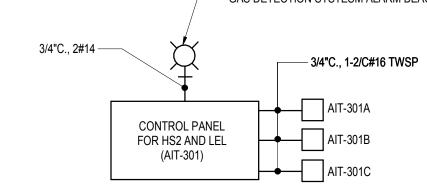

GAS DETECTION WIRING DIAGRAM NOT TO SCALE

GAS DETECTION SYSTESM ALARM BEAC	CON

0' 2' 4'

SCALE: 1/4" = 1'-0"